

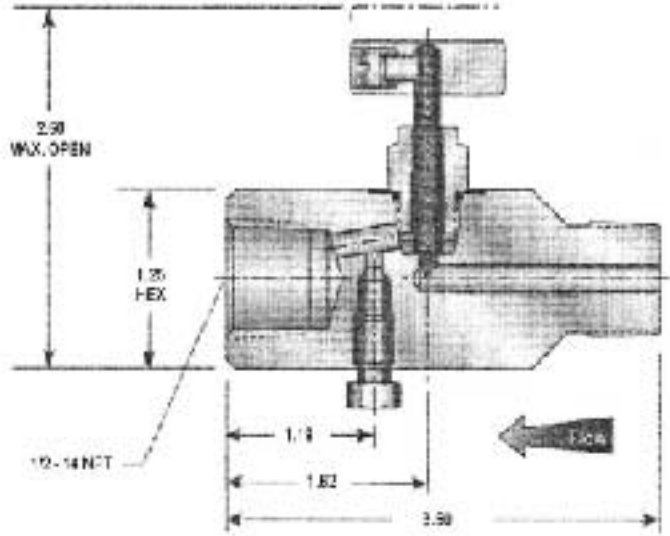
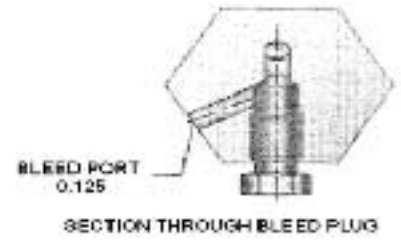




# CARBON STEEL M X F BLEED VALVE SERIES : CPVB-6000 MXF

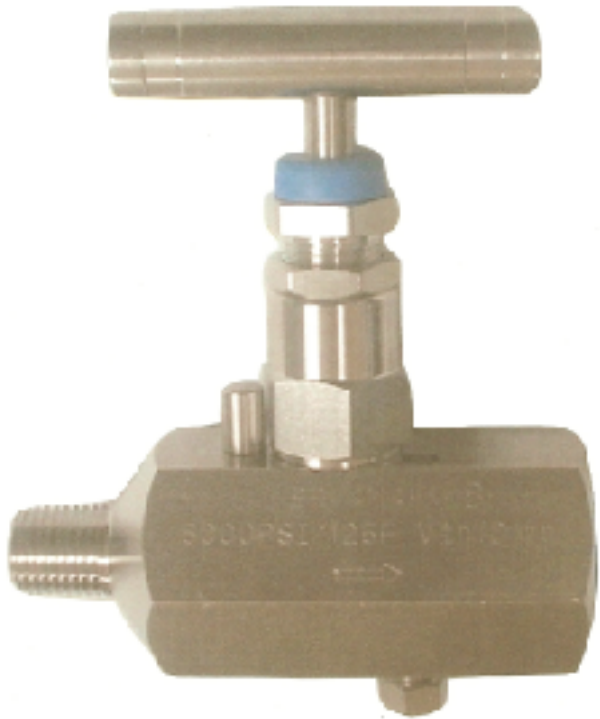

## STANDARD MATERIALS METAL SEAT

VALVE	BODY	BONNET	STEM	PACKING	BLEED PLUG	SEAT
CS	A108 CS	A108 CS	A581-303 SS	TEFLON OR BUNA-N O-RING	A108 CS	INTEGRAL

## SOFT SEAT

VALVE	BODY	BONNET	STEM	PACKING	FLOW WASHER	BLEED PLUG	SEAT
CS	A108 CS	A108 CS	A581-303 SS	TEFLON OR BUNA-N O-RING	316 SS	A108 CS	DELRIN

## PRESSURE & TEMPERATURE RATINGS


### RATING WITH TEFLON OR GRAFOIL BONNET

HARD SEAT	6000 psi @ 200° F
	414 bar @ 93° C
DELRIN & PCTFE	3000 psi @ 200° F
	207 bar @ 93° C

### RATING WITH O-RING BONNET

HARD SEAT	6000 psi @ 200° F
	414 bar @ 93° C
DELRIN & PCTFE	3000 psi @ 200° F
	207 bar @ 93° C

## PRESSURE VS TEMPERATURE

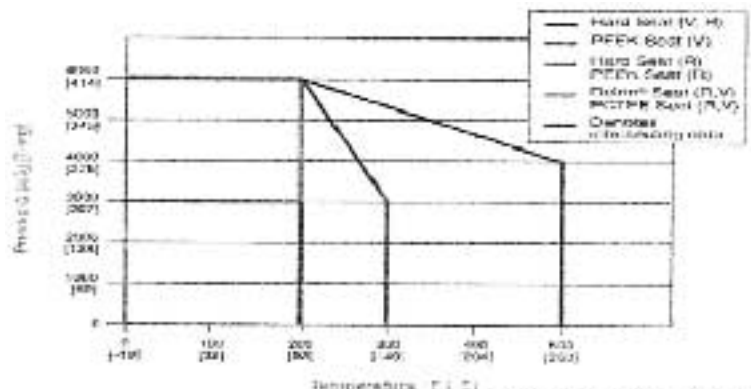

(V) is with Teflon® Bonnet Assembly  
(R) is with Graphite Bonnet Assembly  
(E) is with PEEK Bonnet Assembly

\* Due to the continuous development of our products, design or construction may change without prior notice