

AIR GRIP UNION




Specification:

Air Grip Unions

Chem Oil's Air Grip Unions are for low pressure fluid or mud suction and return lines. A leak tight seal is achieved with rig supplied compressed air, even if the connecting pipe is not perfectly aligned. The oil and abrasion resistant NBR pneumatic tube can be inflated up to 200 psi against the outside diameter of the connecting pipe, speeding field set up and eliminating the need for low pressure flanged connections.

- Allows pipe expansion or misalignment w/o breaking the seal
- Material standard: ASTM A216 Grade WCB
- Medium: Oil, Water and Mud
- Medium Temperature: 32 to 158 degree Fahrenheit
- Environment Temperature: -22 to 122 degree Fahrenheit

Dimension

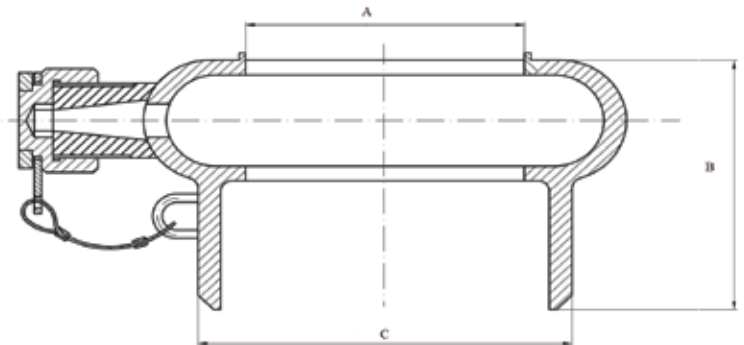

Dimensions (IN)

Sizes	A	B	C	Pneumatic Tube OD
4"	4.84"	4.53"	6.61"	7.50"
6"	7.00"	4.33"	8.62"	9.68"
8"	8.98"	4.33"	10.75"	11.65"
10"	11.10"	4.53"	12.75"	13.85"
12"	13.15"	4.53"	14.76"	15.90"
14"	15.27"	4.53"	16.77"	17.95"

* Due to the continuous development of our products, design or construction may change without prior notice.